

DLK16

electromagnetic valve



Zator
gluing solutions

DATASHEET





TECHNICAL DESCRIPTION

The electromagnetic valve DLK16 has been designed and realized for its use on various kind of production machines operating at high speed: its design and versatility make it ideal for any applications that require the use of dispensing valves.

It's an high-speed dispenser of low and viscosity glues, adhesives and fluids (max 800 mPas). It can be dispense glue dots. It is controlled by a Zator's microprocessor control or by an instrument of external control after testing and approval of Zator company.

Full stainless steel gun, zero cavity short nozzle, needle with ceramic ball. The scaled micrometric adjustment allows a fine control of dot size.

No air supply is needed, the reliability of these valves grant a long working life without any service.

APPLICATION FIELDS

- packaging
- paper converting
- case maker
- printing machine
- tobacco industry
- assembly
- food industry


FLUID TYPES

- cold adhesives and glues
- inks
- paints
- low viscosity fluids

TECHNICAL DATA

technical data

Available nozzle diameters	from 0,2 to 0,8 mm
Valve body	stainless steel
Maximum fluid viscosity	~ 800 mPas
Maximum working pressure	6 bar
Fluid supply connection	M5
Maximum working frequency	1000 dots/sec.
Coil	6 Volt
Weight	170 g




Dots



MODELS


code	description
EA02D01XXX	Electromagnetic valve DLK16KV 6 Volt
<i>Replace XXX value with nozzle diameter desired Available nozzle diameters from 0,30 to 0,80 mm</i>	
EA14E01XXX	Electromagnetic valve DLK16KC 6 Volt with ceramic tip nozzle
<i>Replace XXX value with nozzle diameter desired Available nozzle diameters from 0,20 to 0,30 mm</i>	
CBL000005	Cable DLK16 length 5 mt



Short nozzle KV






Short nozzle KC

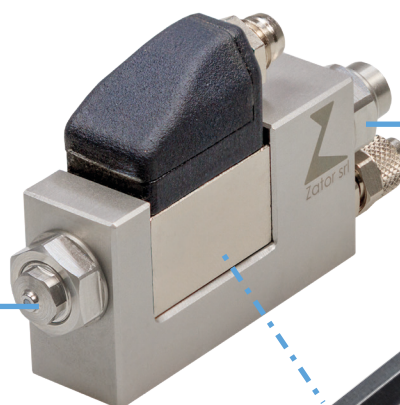Scaled micrometric
adjustment

Needle with ceramic ball




DIMENSIONS

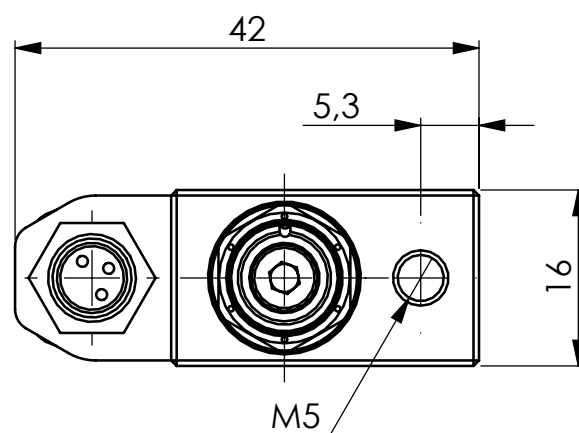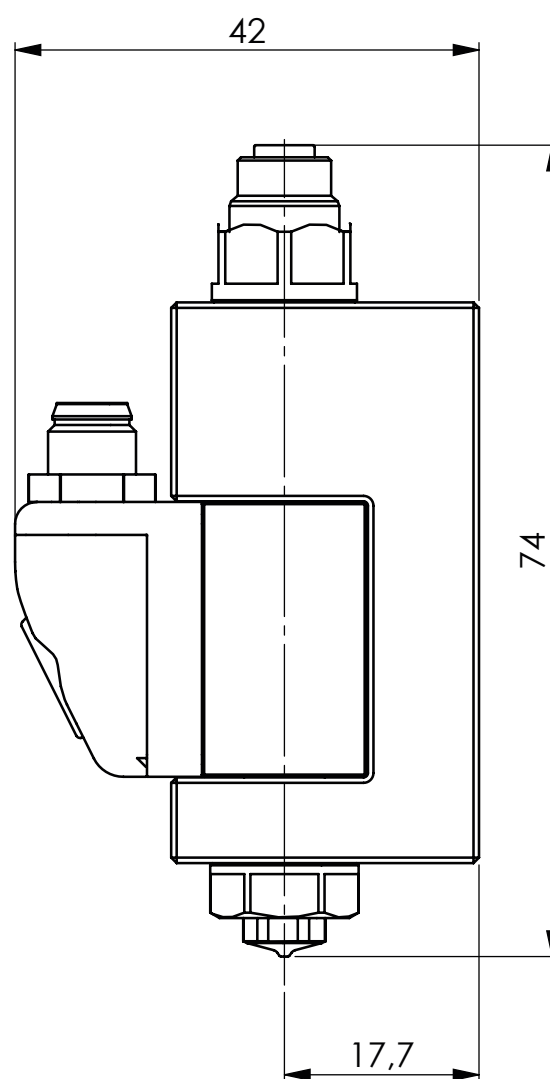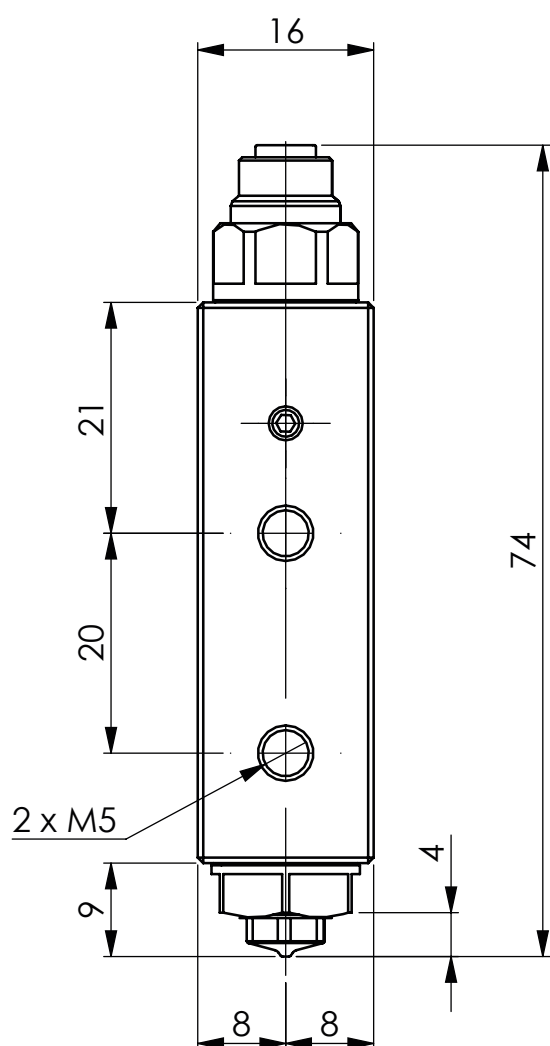



PARTS LIST

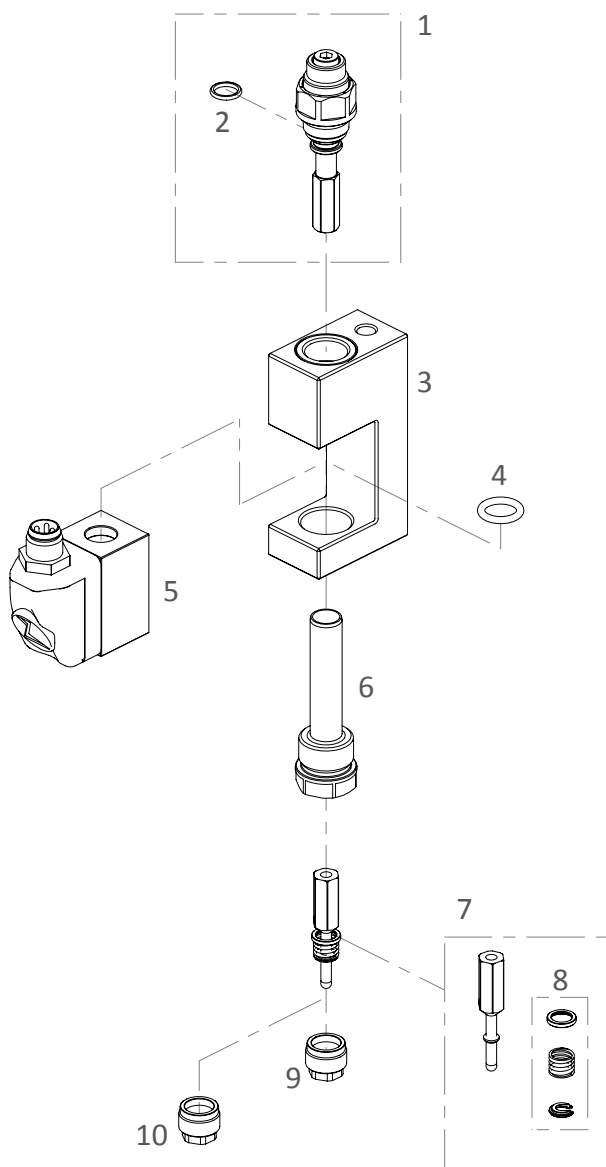

The images in this document are considered for illustration only. The company reserves the right for any changes without notice.
Names, trademarks and logos are property of the author.

pos.	code	q.ty	description
1	MCR000009	1	Micrometric adjustment
2	K92010501	1	O-ring
3	BG000004	1	Valve body
4	K92010703	1	O-ring
5	CL000007	1	Coil 6 Volt
6	GDS00003	1	Guide sleeve
7	NDL000003	1	Needle KV
8	SPK000001	1	Spring kit
9	NZLE0204XXX	1	Nozzle KV
Replace XXX value with nozzle diameter desired Available nozzle diameters from 0,30 to 0,80 mm			
10	NZLE1404XXX	1	Nozzle KC with ceramic tip
Replace XXX value with nozzle diameter desired Available nozzle diameters from 0,20 to 0,30 mm			

ZATOR SRL

Via Galvani, 11
20095 Cusano Milanino (MI)
Italy

Tel. +39 02 66403235

Fax +39 02 66403215

info@zator.it

www.zator.it



Datasheet
DLK16_v02

SEPTEMBER 2020

