

VH2SPL

Electromagnetic Coating Valve



DATASHEET

TECHNICAL DESCRIPTION

The electromagnetic coating valve is an innovative design developed from the VH2 model. It stands out for its new construction design that makes optimal use of the electromagnetic properties of the coil. The electromagnetic drive allows very short lengths of produce to be applied with precision.

Made entirely of stainless steel, it is equipped with a head with 30 mm spreading lips and a useful coating width of 25 mm. The micrometric adjustment allows the quantity of adhesive to be dispensed to be set with precision.

The valve does not require compressed air to operate, thanks to its fully electromagnetic drive.

APPLICATION FIELDS

packaging

paper industry

assembly

food

FLUID TYPES

adhesives and glues

low viscosity fluid

APPLICATION TYPES

coating

TECHNICAL DATA

Spreading width	25 mm
Maximum fluid pressure	35 bar
Coil	6 o 24 Volt
Weight	400 g



Coating

VH2SPL



CODE

EF16CX1200	VH2SPL 30 mm Coating valve	COIL 6Volt
EH16CX1240	VH2SPL 30 mm Coating valve	COIL 24Volt



ELECTROMAGNETIC COATING VALVE VH2SPL

pos.	code	q.ty	description
1	B27000023	1	Micrometric adjustment
2	RNG000008E	1	O-Ring
3	SC000C30201	2	Screw
4	BG000120	1	Rear valve body
5	RNG000011E	1	O-ring
6	CL000018	1	Core coil 6 Volt
6 *	CL000108	1	Core coil 24 Volt
7	BG000156	1	Rear valve body
8	SC000C30101	2	Screw
9	B27001310	1	Guide sleeve
10	RNG000015V	1	O-ring
11	B27003200	1	Needle
12	CTH000700	1	Coating head assembly


CTH000700

pos.	code	q.ty	description
1	SRH000008	1	Coating head
2	SC00030081	3	Screw
3	RNG000008E	1	O-ring
4	CPP000895	1	Lower coating plate
5	CPP000896	1	Upper coating plate
6	SC00030121	2	Screw

VH2SPL

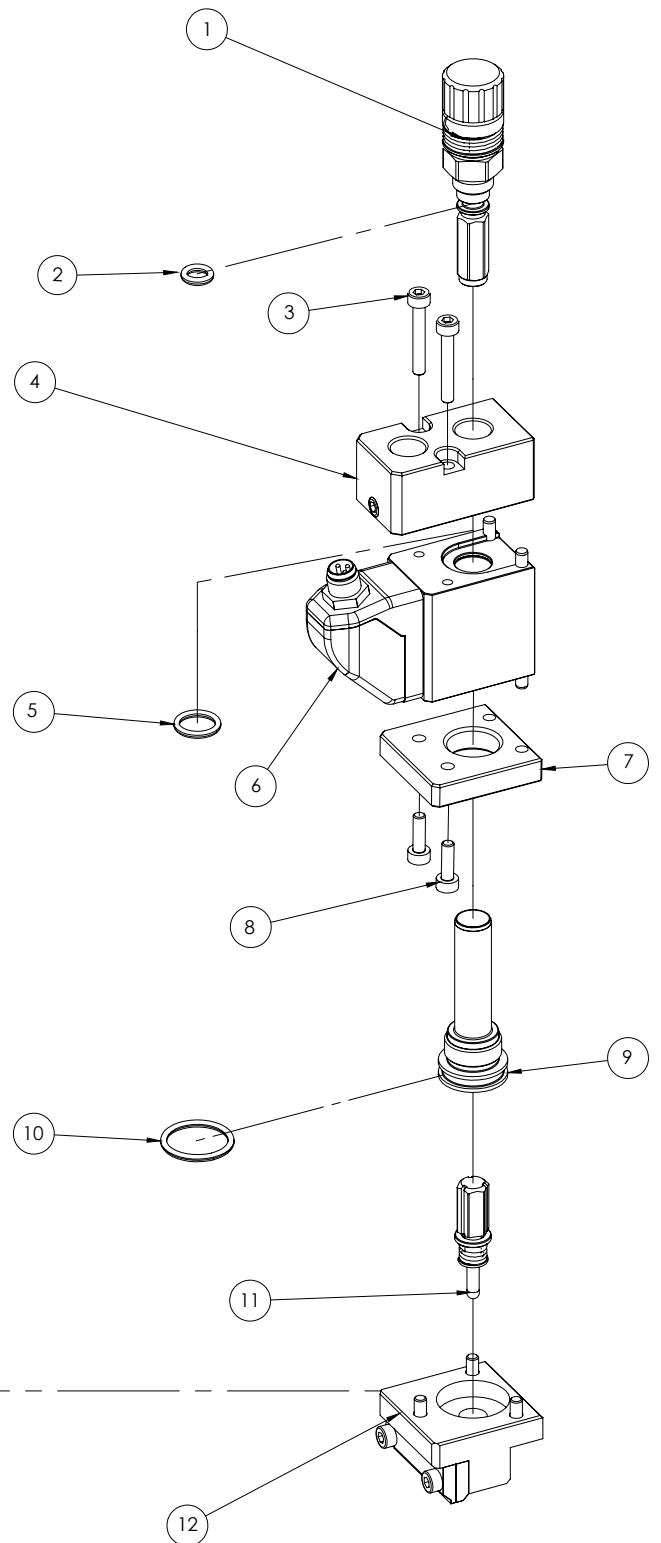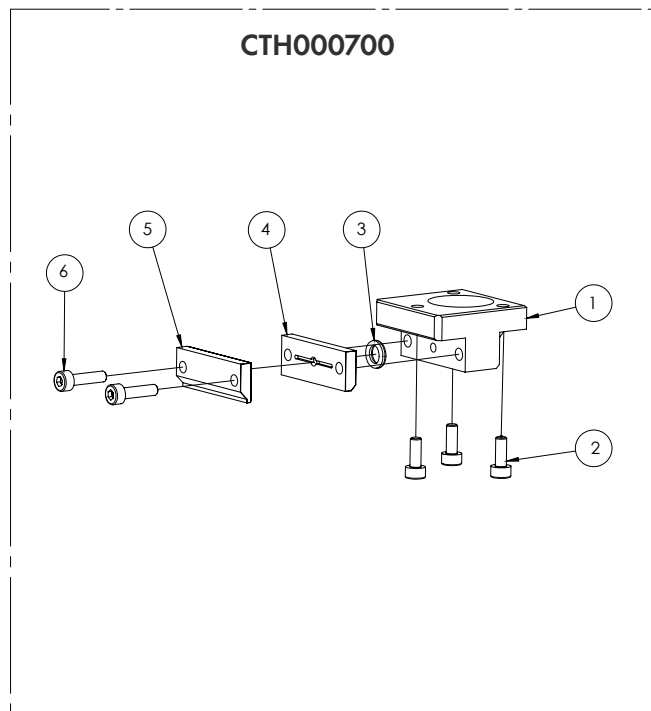

VH2SPL

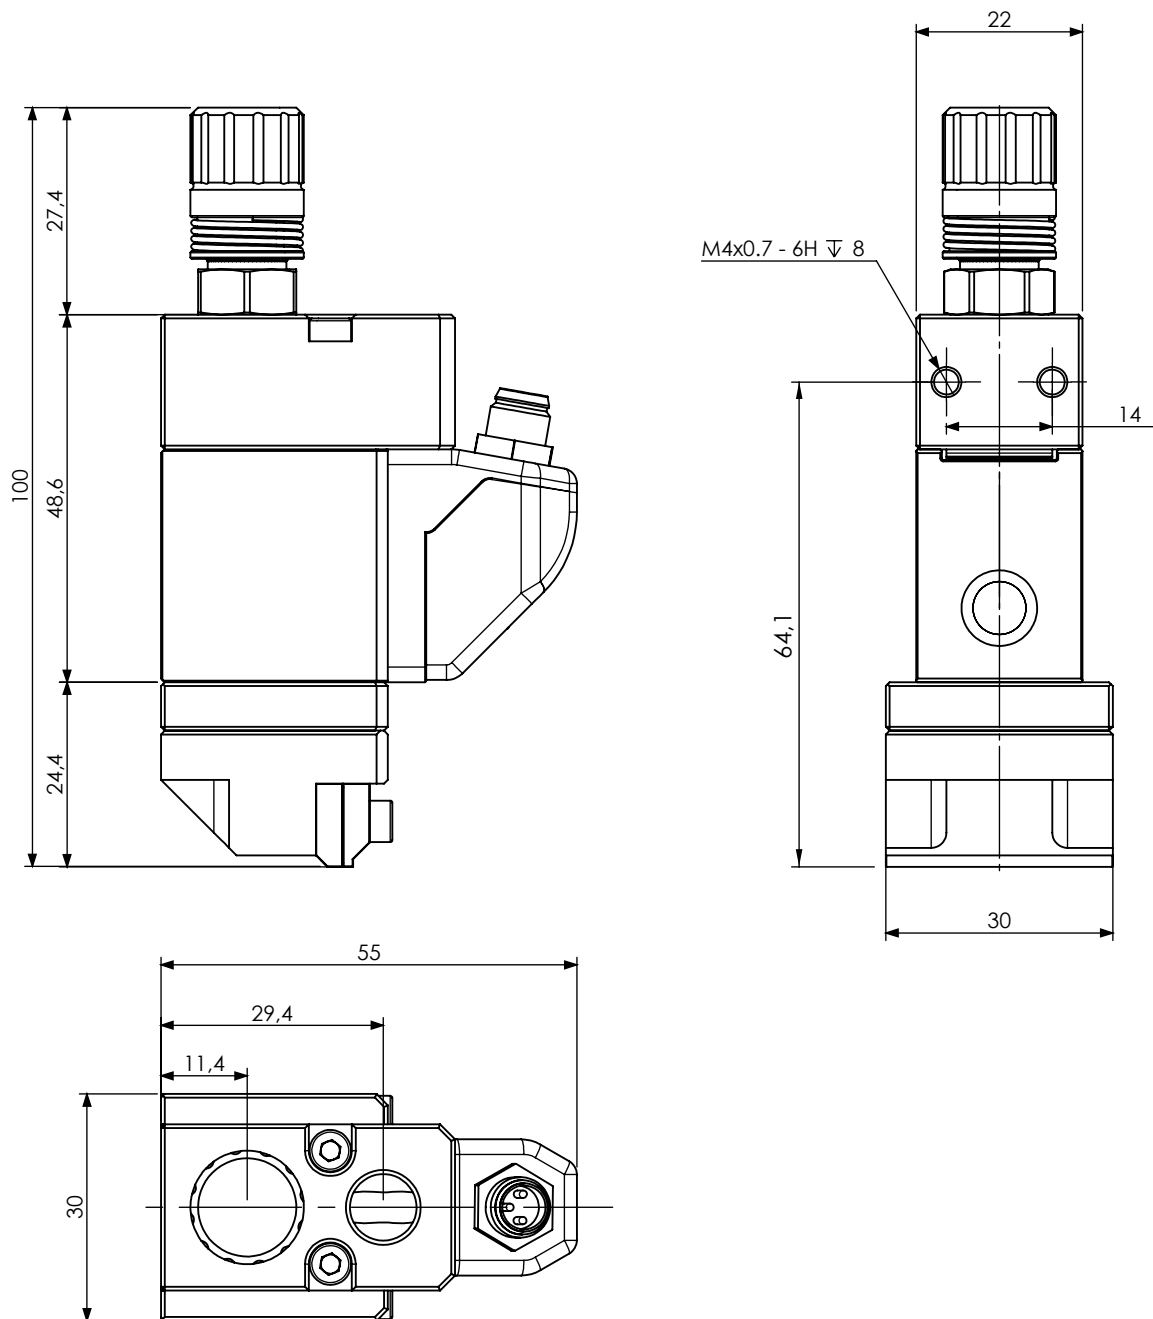

VH2SPL



All images and data in this catalogue are for illustrative purposes only.
considered for illustrative purposes only.
The company reserves the right to make changes without prior notice.

Names, trademarks and logos are the property of the author.

SDATA SHEET VH2SPL
version_01

Via Galvani, 11
20095 Cusano Milanino (MI)
Italia

Tel. +39 02 66403235

Fax +39 02 66403215

info@zator.it

www.zator.it

